




Measurement Guidelines for QUANTAPANEL® 600 Series

1. Measurements should be taken to the nearest 1/8th inch.
2. Take two (2) measurements of the HEIGHT of the opening and two or three (2 – 3) measurements of the WIDTH as shown in the diagram. Record the smallest WIDTH and smallest HEIGHT to the nearest 1/8th inch.
3. To ensure alignment with the meeting rails of the existing double hung window, measure from the top of the opening to the bottom of the existing meeting rail. Record this value as HEIGHT UPPER (UP) to the nearest 1/8th inch.
4. The Installation Method for the 600 Series is INTERIOR.
5. The Installation Reference can be used to identify the floor/room/location. This information will be printed on the product label and packaging documents.

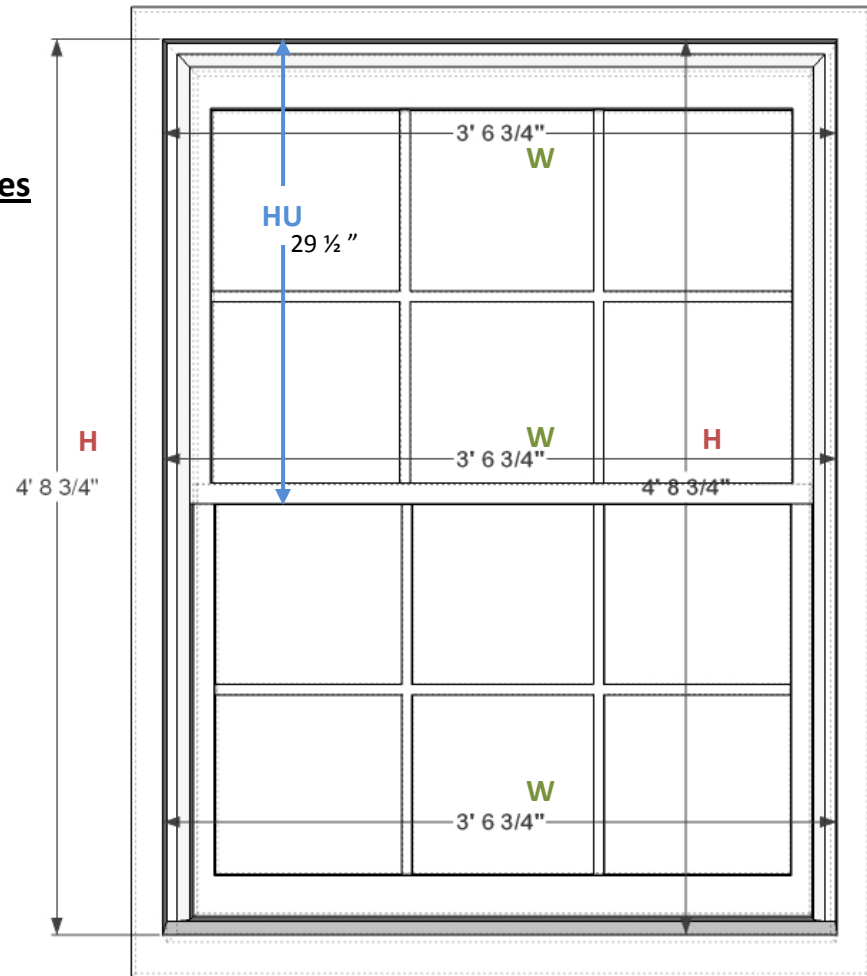

| ITEM | MODEL (STYLE) 504 (DOUBLE HUNG) 502 (PICTURE) 506 (SLIDER) 508 (SKYLIGHT) 602 (INTERIOR PIC) 604 (INTERIOR DH) 606 (INTERIOR SL) 608 (JALOUSIE) | EXISTING OPENING | | HEIGHT UPPER (ORIEL CONFIG) | SILL EXPANDER TYPE: 0, 1" | INSTALL METHOD BLINDSTOP OVERLAP MAKE SIZE INTERIOR | COLOR (NS) | QUANTITY | INSTALLATION REFERENCE |
|------|---|--------------------------------|--------------------------------|--------------------------------|------------------------------|---|------------|----------|------------------------|
| | | WIDTH (W) | HEIGHT (H) | | | | | | |
| 1 | 604DH | 42 ³ / ₄ | 56 ³ / ₄ | 29 ¹ / ₂ | 1" | INTERIOR | WHT | 1 | KITCHEN |